

MUNICIPAL CORPORATION BHILAI (C.G.)

NIT


कार्य का नाम :- वार्ड-04 राधिका नगर व्ही.आई.पी. रोड से तालाब रोड तक पेवर ब्लाक लगाने का कार्य।

Pwd Building Sor 01.01.2015


S.No.	Description and details of work	Qty.	Unit
1	Providing and filling in plinth with sand/ Crusher dust and hard moorum under floor in layers not exceeding 20cm in depth consolidating each deposited layer by ramming and watering, including dressing etc. complete.	62.50	Cum
2	Providing & laying 60mm thick precast interlocking concrete blocks of approved size (approx 305 sqcm) and shape/ pattern, over 40 mm thick average complete coarse sand bed with joints of 3mm thick filled by fine sand including leveling with surface vibrator, temping and sweeping etc. complete of minimum compressive strength of 250 kg/sq.cm Pigment Coloured (rubber mould) precast interlock concrete blocks	625.00	Sqm
3	Providing and laying nominal mix plain cement concrete with crushed stone aggregate using concrete mixer in all works upto plinth level excluding cost of form work. 1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20mm nominal size).	20.00	Cum



Executive Engineer
Municipal Corporation
Bhilai (C.G)

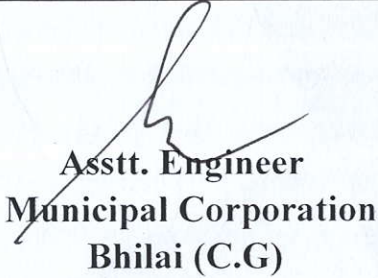

Asstt. Engineer
Municipal Corporation
Bhilai (C.G)



Sub. Engineer
Municipal Corporatio
Bhilai (C.G)